




# Fixture Specification

MODEL # **CCV16 LED**

STYLE / LIGHT / WATTAGE / KELVIN / DRIVER / FINISH / LENS / ACCESSORIES / SIZE / COMPLIANCE  
SOURCE / DETAIL

PROJECT : \_\_\_\_\_ TYPE : \_\_\_\_\_ NOTE : \_\_\_\_\_

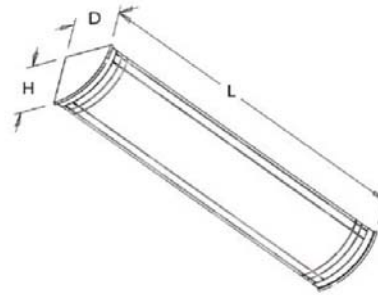

**FIXTURE FEATURES**

- EACH FIXTURE THERMALLY TESTED TO INSURE LONGEVITY
- MAXIMUM LIGHT DISTRIBUTION THROUGHOUT LENS
- OVER CURRENT, OVER VOLTAGE, SHORT CIRCUIT PROTECTION

**BASE:** C.R STEEL CONSTRUCTION  
**Mounts with Holes and Knockouts Provided**

**END CAP** BRUSHED NICKEL

**LENS:** Cut Etched Acrylic  
UV Stabilized  
Non Yellowing

**SIZE(s)**

**KELVIN:** 4000K **CRI:** 90

**POWER FACTOR:** HIGH

**VOLTAGE:** 90V / 305VAC

**COMPLIANCE:** UL LISTED  
DAMP LOCATION

**MIA:** MADE IN AMERICA

**LED LIGHT SYSTEM**

- LG / NICHIA BRAND LED CHIPS
- CONSTANT CURRENT DESIGN
- AVERAGE 85 (LPW) LUMENS PER WATT
- DIMMING DOWN TO 10 % WITH MOST STANDARD 0 -10 VOLT WALL BOX DIMMERS
- **DRIVER :** UL LISTED
- **MODULE :** CSA LISTED
- LM80 TESTED
- ROHS COMPLIANT
- **LIFE HOURS :** 50,000
- **WARRANTY :** LIMITED 5 YEARS

SYSTEM WATTAGE ESTIMATE	LED ENGINE LUMENS				LED'S PER MODULE	LEGACY 40K SUBSTITUTE
	2700K	3000K	3500K	4000K		
13	1014	1083	1130	1165	60	T8 17 / T5 14
19	1351	1444	1506	1553	90	T8 25 / T5 21
21	1622	1508	1808	1864	120	T8 32 / T5 28
24	1824	1696	2033	2096	120	(2) T8 17 / T5 14
39	2782	2587	3120	3198	180	(2) T8 25 / T5 21
44	3300	3069	3679	3793	240	(2) T8 32 / T5 28

**SPECIAL OPTIONS**

KELVIN

- 2700K
- 3000K
- 3500K

FINISH

- FB - BLACK
- FBZ - BRONZETONE
- FCU - CUSTOM
- FSN - SATIN NICKEL
- FW - WHITE

LENS

- CPA CLEAR PRISMATIC
- FA FAUX ALABASTER
- WA WHITE ACRYLIC
- 
- 

ACCESSORIES

- EBA - EXTENDED BASE
- FUS - FUSE
- IB - INDIVIDUAL BOX
- IPC- PHOTO CONTROL
- PCH - PULL CHAIN
- TP - TAMPER SCREWS

SIZE Length Height Depth

- 25" 5" 4"
- 37" 5" 4"
- 49" 5" 4"
- 

TECHNOLOGY

- EMG - EMERGENCY
- EMGR- EMERGENCY REMOTE
- OC - OCCUPANCY SENSOR

CUSTOM

- 
- 
- 
- 

For Additional Accessories and Options Visit [www.aslighting.com](http://www.aslighting.com)