




# Fixture Specification

MODEL #: **RFKS**

STYLE / LAMP / LAMP / WATTAGE / KELVIN / BALLAST / FINISH / LENS / ACCESSORIES / SIZE / COMPLIANCE  
QTY TYPE TYPE DETAIL

PROJECT : \_\_\_\_\_ TYPE : \_\_\_\_\_ NOTE : \_\_\_\_\_

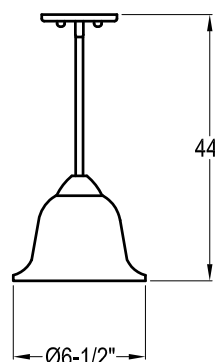

**FIXTURE FEATURES**

- EACH FIXTURE THERMALLY TESTED TO INSURE LONGEVITY
- MAXIMUM LIGHT DISTRIBUTION THROUGHOUT LENS
- OVER CURRENT, OVER VOLTAGE, SHORT CIRCUIT PROTECTION

BASE: STEEL CONSTRUCTION  
MOUNTS TO ELECTRICAL BOX WITH CANOPY AND 36" CHAIN  
FINISH: SATIN NICKEL  
SHADE: OPAL GLASS

POWER FACTOR: HIGH  
INPUT VOLTAGE: 120V;50/60Hz  
COMPLIANCE: CSA LISTED  
KELVIN: 3000  
CRI: 80  
MADE IN AMERICA  
DAMP LOCATION

**LED LIGHT SOURCE**

- LG / NICHIA BRAND LED CHIPS
- CONSTANT CURRENT DESIGN AVERAGE 100 - 120LPM ( LUMEN PER WATT ) AT MODULE EFFICACY
- TRIAC OR ELECTRONIC LOW VOLTAGE DIMMING DOWN TO 5% WITH WALL BOX DIMMERS
- DRIVER: UL LISTED
- MODULE: CSA LISTED
- LM80 & LM82 TESTED
- ROHS COMPLIANT
- LIFE HOURS: 50,000
- WARRANTY: LIMITED 5 YEARS

SYSTEM WATTAGE	LED ENGINE LUMENS				LEGACY 30K SUBSTITUTE
	2700K	3000K	3500K	4000K	
10 / 12 DRIVERLESS		1000 / 800		1000 / 800	

**SPECIAL OPTIONS**

- DRIVER**
- DV 120 / 277 (NON DIMMABLE)
  - DVD 120 / 277 (0-10V DIMMABLE)
  - EMG EMERGENCY
  - EMGR EMERGENCY REMOTE

- FINISH**
- FCU CUSTOM (ANY FINISH AVAILABLE)

- COMPLIANCE**
- ES ENERGY STAR (WHEN SPECIFIED)

- KELVIN**
- 2700K
  - 3500K
  - 4000K
  - 5000K

- ACCESSORIES**
- FUS FUSE
  - IB INDIVIDUAL BOX
  - SP SURGE PROTECTOR

For Additional Accessories and Options Visit [www.aslighting.com](http://www.aslighting.com)

ASL  
25 Twelfth Street  
Brooklyn, NY 11215-3820

Toll Free  
Phone: 800-369-1101  
Fax: 800-552-3465



Local  
Phone: 718-369-1100  
Fax: 718-369-1105

Online  
email: [info@aslighting.com](mailto:info@aslighting.com)  
visit: [www.aslighting.com](http://www.aslighting.com)

© copyright 2008 by American Scientific Lighting Corp. All rights reserved.

**RFKS**