



Fixture specification




MODEL # : **CGV**

STYLE / LAMP / LAMP / WATTAGE / KELVIN / BALLAST / FINISH / LENS / ACCESSORIES / SIZE / COMPLIANCE
QTY TYPE DETAIL

PROJECT : _____ TYPE : _____ NOTE : _____



- SIZE**
- W10-1/4" D5-1/4"
 - W10-3/8" D5-3/8"

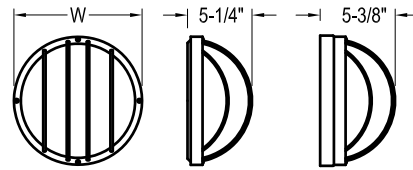

FIXTURE FEATURES

- EACH FIXTURE THERMALLY TESTED TO INSURE LONGEVITY
- MAXIMUM LIGHT DISTRIBUTION THROUGHOUT LENS
- OVER CURRENT, OVER VOLTAGE, SHORT CIRCUIT PROTECTION

BASE: INJECTION MOLDED POLYCARBONATE
5-1/4" LUMINAIRE DEPTH

ALUMINUM
5-3/8" LUMINAIRE DEPTH
1/2" ALLOWANCE FOR SURFACE WIRE MOLD AND/OR INTERNAL PHOTOCELL

MOUNTS TO ELECTRICAL BOX WITH CENTER NIPPLE

FINISH: BLACK

LENS: OPAL WHITE POLYCARBONATE
UV STABILIZED
NON-YELLOWING

POWER FACTOR: HIGH
INPUT VOLTAGE: 120V/50/60Hz
COMPLIANCE: UL AND/OR CSA LISTED
KELVIN: 3000
CRI: 80

MADE IN AMERICA
WET LOCATION

LED LIGHT SOURCE

- LG / NICHIA BRAND LED CHIPS
- CONSTANT CURRENT DESIGNN AVERAGE 100 - 120LPM (LUMEN PER WATT) AT MODULE EFFICACY
- TRIAC OR ELECTRONIC LOW VOLTAGE DIMMING DOWN TO 5% WITH WALL BOX DIMMERS
- DRIVER: UL LISTED
- MODULE: CSA LISTED
- LM80 & LM82 TESTED
- ROHS COMPLIANT
- LIFE HOURS: 50,000
- WARRAANTY: LIMITED 5 YEARS

SYSTEM WATTAGE	LED ENGINE LUMENS					LEGACY 30K SUBSTITUTE
	2700K	3000K	3500K	4000K	5000K	
10 / 12 DRIVERLESS		1000 / 800		1000 / 800		CFL 13
15 DRIVERLESS		1200 / 1500		1200 / 1500		CFL 2 x 13
22 / 25 DRIVERLESS		1800 / 2500		1800 / 2500		CFL 3 x 13
10	1062	1095	1160	1171	1193	CFL 18
12.5	1159	1195	1266	1278	1302	CFL 2 x 13
19	1799	1855	1966	1984	2021	CFL 2 x 18
21	1978	2040	2162	2182	2223	CFL 3 x 13
22.3	2158	2225	2358	2380	2425	CFL 2 x 26
25	2600	2867	3000	3022	3067	CFL 2 x 32
38	3700	3867	4000	4022	4067	CFL 4 x 26

SPECIAL OPTIONS

- DRIVER**
- DV 120 / 277 (NON DIMMABLE)
 - DVD 120 / 277 (0-10V DIMMABLE)
 - EMG EMERGENCY
 - EMGR EMERGENCY REMOTE

- FINISH**
- FW WHITE
- COMPLIANCE**
- ES ENERGY STAR (WHEN SPECIFIED)

- KELVIN**
- 2700K
 - 3500K
 - 4000K
 - 5000K

- ACCESSORIES**
- FUS FUSE
 - IB INDIVIDUAL BOX
 - IPC INTERNAL PHOTOCELL (ON LUMINAIRE 5-3/8" DEEP)
 - OC OCCUPANCY SENSOR
 - SP SURGE PROTECTOR
 - TP TAMPER SCREWS

For Additional Accessories and Options Visit www.aslighting.com

ASL
25 Twelfth Street
Brooklyn, NY 11215-3820

Toll Free
Phone: 800-369-1101
Fax: 800-552-3465



Local
Phone: 718-369-1100
Fax: 718-369-1105

Online
email: info@aslighting.com
visit: www.aslighting.com

CGV