




Fixture specification

MODEL # : **COF**

STYLE / LAMP / LAMP / WATTAGE / KELVIN / BALLAST / FINISH / LENS / ACCESSORIES / SIZE / COMPLIANCE
QTY TYPE DETAIL

PROJECT : _____ TYPE : _____ NOTE : _____

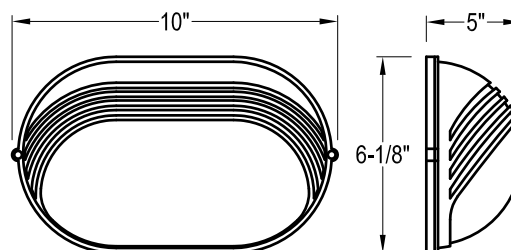

FIXTURE FEATURES

- EACH FIXTURE THERMALLY TESTED TO INSURE LONGEVITY
- MAXIMUM LIGHT DISTRIBUTION THROUGHOUT LENS
- OVER CURRENT, OVER VOLTAGE, SHORT CIRCUIT PROTECTION

BASE: DIE CAST ALUMINUM
MOUNTS OVER ELECTRICAL BOX

FINISH: BRONZETONE
LENS: FROSTED GLASS

POWER FACTOR: HIGH
INPUT VOLTAGE: 120V:50/60Hz
COMPLIANCE: CSA LISTED
KELVIN: 3000
CRI: 80

MADE IN AMERICA
WET LOCATION

LED LIGHT SOURCE

- LG / NICHIA BRAND LED CHIPS
- CONSTANT CURRENT DESIGN
AVERAGE 100 - 120LPM
(LUMEN PER WATT)
AT MODULE EFFICACY

- TRIAC OR ELECTRONIC LOW VOLTAGE DIMMING DOWN TO 5% WITH WALL BOX DIMMERS
- DRIVER: UL LISTED
- MODULE: CSA LISTED

- LM80 & LM82 TESTED
- ROHS COMPLIANT
- LIFE HOURS: 50,000
- WARRANTY: LIMITED 5 YEARS

SYSTEM WATTAGE	LED ENGINE LUMENS					LED'S PER MODULE	LEGACY 30K SUBSTITUTE
	2700K	3000K	3500K	4000K	5000K		
10	1062	1095	1160	1171	1193	32	CFL 18
12.5	1159	1195	1266	1278	1302	40	CFL 2 x 13
18.8	1799	1855	1966	1984	2021	56	CFL 2 x 18
20.7	1978	2040	2162	2182	2223	64	CFL 3 x 13
22.3	2158	2225	2358	2380	2425	72	CFL 2 x 26
27	2600	2867	3000	3022	3067	80	CFL 2 x 32
38	3700	3867	4000	4022	4067	80	CFL 4 x 26

SPECIAL OPTIONS

- DRIVER**
- DV 120 / 277 (NON DIMMABLE)
 - DVD 120 / 277 (0-10V DIMMABLE)
 - EMG EMERGENCY
 - EMGR EMERGENCY REMOTE

FINISH

- FB BLACK
- FCU CUSTOM
- FW WHITE

KELVIN

- 2700K
- 3500K
- 4000K
- 5000K

ACCESSORIES

- FUS FUSE
- IB INDIVIDUAL BOX

For Additional Accessories and Options Visit www.aslighting.com

ASL
25 Twelfth Street
Brooklyn, NY 11215-3820

Toll Free
Phone: 800-369-1101
Fax: 800-552-3465



Local
Phone: 718-369-1100
Fax: 718-369-1105

Online
email: info@aslighting.com
visit: www.aslighting.com

© copyright 2008 by American Scientific Lighting Corp. All rights reserved.

COF