




# Fixture Specification

MODEL #: **DFV**

STYLE / LAMP / LAMP / WATTAGE / KELVIN / BALLAST / FINISH / LENS / ACCESSORIES / SIZE / COMPLIANCE  
QTY TYPE DETAIL

PROJECT : \_\_\_\_\_ TYPE : \_\_\_\_\_ NOTE : \_\_\_\_\_

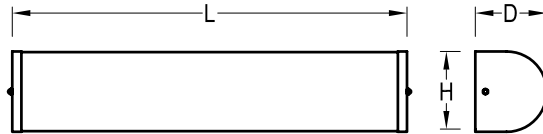

### Light Source

| Type     | Twin Tube |    |     |    |    |    | Quad |    | Linear |    |       |    | Length | Height | Depth |         |        |        |
|----------|-----------|----|-----|----|----|----|------|----|--------|----|-------|----|--------|--------|-------|---------|--------|--------|
|          | 13        | 18 | 24  | 36 | 40 | 55 | 18   | 26 | T8     |    | T5 HO |    |        |        |       |         |        |        |
| Wattage  |           |    |     |    |    |    |      |    | 15     | 17 | 25    | 32 | 24     | 39     | 54    |         |        |        |
| Quantity | 3         | 2  | 1/2 | 1  | -  | -  | 3    | -  | -      | -  | 1/2   | -  | -      | 1      | -     | 24-1/4" | 5-1/4" | 4-1/4" |
|          | -         | -  | 2   | -  | 1  | 1  | -    | -  | -      | -  | 1/2   | -  | -      | 1      | -     | 36-1/4" | 5-1/4" | 4-1/4" |
|          | -         | -  | -   | 2  | -  | -  | -    | -  | -      | -  | 1/2   | -  | -      | 1      | -     | 48-1/4" | 5-1/4" | 4-1/4" |

### Standard Features

|             |  |                     |   |             |  |
|-------------|--|---------------------|---|-------------|--|
| <b>BASE</b> | White Die Formed Steel<br>Mounts with Holes and Knockouts Provided | <b>FINISH/ ENDS</b> | Brass   | <b>LENS</b> | White Fluted Acrylic<br>UV Stabilized<br>Non Yellowing |
| <b>LAMP</b> | Twin and Quad - 2700K<br>Linear - 4100K                            | <b>TECHNOLOGY</b>   | Electronic Ballast<br>Normal Power Factor<br>120V-60Hz AC<br>UL Listed<br>Damp Location |             |  |

### Special options

Please Note: Standard Features May Change if Fixtures are Ordered with Special Option(s).

|                |   |                     |  |
|----------------|---|---------------------|--|
| <b>BALLAST</b> | <input type="checkbox"/> DV 120/277<br><input type="checkbox"/> EBD Dimmable<br><input type="checkbox"/> EMG Emergency<br><input type="checkbox"/> HPF High Power Factor<br><input type="checkbox"/> V 277 Volt | <b>FINISH/ ENDS</b> | <input type="checkbox"/> CUE Custom<br><input type="checkbox"/> CE Chrome  |
| <b>KELVIN</b>  | <input type="checkbox"/> 3500K<br><input type="checkbox"/> 4100K  | <b>TECHNOLOGY</b>   | <input type="checkbox"/> GU24 ( Energy Star Compliant Component )<br><input type="checkbox"/> LED<br><input type="checkbox"/> Occupancy Sensor |
|                |   | <b>COMPLIANCE</b>   | <input type="checkbox"/> ES Energy Star<br><input type="checkbox"/> MIA  Made In America   |

For Additional Accessories and Options Visit [www.aslighting.com](http://www.aslighting.com)

ASL  
25 Twelfth Street  
Brooklyn, NY 11215-3820

Toll Free  
Phone: 800-369-1101  
Fax: 800-552-3465

Local  
Phone: 718-369-1100  
Fax: 718-369-1105

Online  
email: [info@aslighting.com](mailto:info@aslighting.com)  
visit: [www.aslighting.com](http://www.aslighting.com)



© copyright 2008 by American Scientific Lighting Corp. All rights reserved.

**DFV**