




# Fixture specification

MODEL #: **DSF**

STYLE / WATTAGE / KELVIN / FINISH / LENS / ACCESSORIES / SIZE / COMPLIANCE

PROJECT : \_\_\_\_\_ TYPE : \_\_\_\_\_ NOTE : \_\_\_\_\_

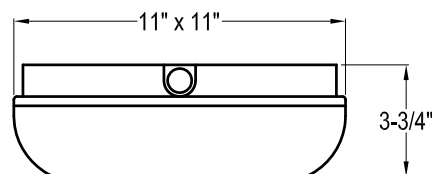

**FIXTURE FEATURES**

- EACH FIXTURE THERMALLY TESTED TO INSURE LONGEVITY
- MAXIMUM LIGHT DISTRIBUTION THROUGHOUT LENS
- OVER CURRENT, OVER VOLTAGE, SHORT CIRCUIT PROTECTION

HOUSING: INJECTION MOLDED POLYCARBONATE

MOUNTS OVER ELECTRICAL BOX

FINISH: WHITE

LENS: OPAL WHITE POLYCARBONATE  
UV STABILIZED  
NON-YELLOWING

POWER FACTOR: HIGH

INPUT VOLTAGE: 120-277V;50/60Hz  
COMPLIANCE: UL AND/OR CSA LISTED  
KELVIN: 3000  
CRI: 80

MADE IN AMERICA  
WET LOCATION

**LED LIGHT SOURCE**

- LG / NICHIA BRAND LED CHIPS
- CONSTANT CURRENT DESIGNN AVERAGE 100 - 120LPM ( LUMEN PER WATT ) AT MODULE EFFICACY

- TRIAC OR ELECTRONIC LOW VOLTAGE DIMMING DOWN TO 5% WITH WALL BOX DIMMERS
- DRIVER: UL LISTED
- MODULE: CSA LISTED

- LM80 & LM82 TESTED
- ROHS COMPLIANT
- LIFE HOURS: 50,000
- WARRAANTY: LIMITED 5 YEARS

SYSTEM WATTAGE	LED ENGINE LUMENS					LEGACY 30K SUBSTITUTE
	2700K	3000K	3500K	4000K	5000K	
23		1300		1300	1300	CFL 2 x 13

**SPECIAL OPTIONS**

DRIVER

- EMG EMERGENCY
- EMGR EMERGENCY REMOTE

KELVIN

- 3000K
- 4000K
- 5000K

COMPLIANCE

- ES ENERGY STAR (WHEN SPECIFIED)

ACCESSORIES

- FUS FUSE
- EPC EXTERNAL PHOTOCELL
- FUS FUSE
- IB INDIVIDUAL BOX
- IPC INTERNAL PHOTOCELL
- OC OCCUPANCY SENSOR
- SP SURGE PROTECTOR

For Additional Accessories and Options Visit [www.aslighting.com](http://www.aslighting.com)

ASL  
25 Twelfth Street  
Brooklyn, NY 11215-3820

Toll Free  
Phone: 800-369-1101  
Fax: 800-552-3465



Local  
Phone: 718-369-1100  
Fax: 718-369-1105

Online  
email: [info@aslighting.com](mailto:info@aslighting.com)  
visit: [www.aslighting.com](http://www.aslighting.com)

© copyright 2008 by American Scientific Lighting Corp. All rights reserved.

**DSF**