



Fixture Specification


MODEL # : **INCH**

STYLE / LAMP / LAMP / WATTAGE / KELVIN / BALLAST / FINISH / LENS / ACCESSORIES / SIZE / COMPLIANCE
QTY TYPE DETAIL

PROJECT : _____ TYPE : _____ NOTE : _____



- SIZE**
- L26-1/4" W8-1/2" H3-1/2"
 - L50-1/4" W8-1/2" H3-1/2"

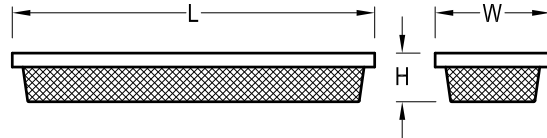

FIXTURE FEATURES

- EACH FIXTURE THERMALLY TESTED TO INSURE LONGEVITY
- MAXIMUM LIGHT DISTRIBUTION THROUGHOUT LENS
- OVER CURRENT, OVER VOLTAGE, SHORT CIRCUIT PROTECTION

- BASE:** STEEL CONSTRUCTION
MOUNTS TO STRUCTURE WITH PRE-PUNCHED HOLES FOR SECURE ANCHORING
- FINISH:** WHITE
- LENS:** CLEAR PRISMATIC POLYCARBONATE
UV STABILIZED
NON-YELLOWING

- POWER FACTOR:** HIGH
INPUT VOLTAGE: 120V/50/60Hz
COMPLIANCE: UL AND/OR CSA LISTED
KELVIN: 3000
CRI: 80
MADE IN AMERICA
WET LOCATION

LED LIGHT SOURCE

- LG / NICHIA BRAND LED CHIPS
- CONSTANT CURRENT DESIGNN AVERAGE 100 - 120LPM (LUMEN PER WATT) AT MODULE EFFICACY
- TRIAC OR ELECTRONIC LOW VOLTAGE DIMMING DOWN TO 5% WITH WALL BOX DIMMERS
- DRIVER: UL LISTED
- MODULE: CSA LISTED
- LM80 & LM82 TESTED
- ROHS COMPLIANT
- LIFE HOURS: 50,000
- WARRAANTY: LIMITED 5 YEARS

SYSTEM WATTAGE	LED ENGINE LUMENS				LEGACY 30K SUBSTITUTE
	2700K	3000K	3500K	4000K	
13	1314	1383	1430	1465	T8 17 / T5 14
19	1951	2044	2106	2153	T8 25 / T5 21
21	2122	2208	2308	2364	T8 32 / T5 28
24	2424	2496	2533	2596	(2) T8 17 / T5 14
39	3982	4087	4120	4198	(2) T8 25 / T5 21
44	4400	4469	4579	4593	(2) T8 32 / T5 28

SPECIAL OPTIONS

- DRIVER**
- DV 120 / 277 (NON DIMMABLE)
 - DVD 120 / 277 (0-10V DIMMABLE)
 - EMG EMERGENCY
 - EMGR EMERGENCY REMOTE

- COMPLIANCE**
- ES ENERGY STAR (WHEN SPECIFIED)

- KELVIN**
- 2700K
 - 3500K
 - 4000K
 - 5000K

- ACCESSORIES**
- FUS FUSE
 - IB INDIVIDUAL BOX
 - OC OCCUPANCY SENSOR
 - SP SURGE PROTECTOR
 - TP TAMPER SCREWS

For Additional Accessories and Options Visit www.aslighting.com

ASL
25 Twelfth Street
Brooklyn, NY 11215-3820

Toll Free
Phone: 800-369-1101
Fax: 800-552-3465



Local
Phone: 718-369-1100
Fax: 718-369-1105

Online
email: info@aslighting.com
visit: www.aslighting.com

INCH