




Fixture specification

MODEL # : **INSE**
 STYLE / WATTAGE / KELVIN / FINISH / LENS / ACCESSORIES / SIZE / COMPLIANCE

PROJECT : _____ TYPE : _____ NOTE : _____

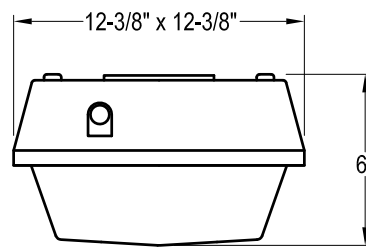

FIXTURE FEATURES

- EACH FIXTURE THERMALLY TESTED TO INSURE LONGEVITY
- MAXIMUM LIGHT DISTRIBUTION THROUGHOUT LENS
- OVER CURRENT, OVER VOLTAGE, SHORT CIRCUIT PROTECTION

BASE: DIE-CAST ALUMINUM

MOUNTS OVER ELECTRICAL BOX OR TO STRUCTURE FOR SURFACE CONDUIT
 TWO 1/2" THREADED APERTURES

POWER FACTOR: HIGH

INPUT VOLTAGE: 120V/50/60Hz
 KELVIN: 5000
 CRI: 75
 COMPLIANCE: UL AND/OR CSA LISTED
 MADE IN AMERICA
 WET LOCATION

FINISH: BLACK
LENS: OPAL POLYCARBONATE
 UV STABILIZED
 NON-YELLOWING

LED LIGHT SOURCE

- LG / NICHIA BRAND LED CHIPS
- CONSTANT CURRENT DESIGN
 AVERAGE 100 - 120LPM
 (LUMEN PER WATT)
 AT MODULE EFFICACY

- TRIAC OR ELECTRONIC LOW VOLTAGE DIMMING DOWN TO 5% WITH WALL BOX DIMMERS
- DRIVER: UL LISTED
- MODULE: CSA LISTED

- LM80 & LM82 TESTED
- ROHS COMPLIANT
- LIFE HOURS: 50,000
- WARRAANTY: LIMITED 5 YEARS

SYSTEM WATTAGE	LED ENGINE LUMENS					LEGACY 30K SUBSTITUTE
	2700K	3000K	3500K	4000K	5000K	
34					2700	CFL 2 x 32
48					4100	CFL 4 x 26

SPECIAL OPTIONS

- DRIVER**
- DV 120 / 277 (NON DIMMABLE)
 - DVD 120 / 277 (0-10V DIMMABLE)
 - EMG EMERGENCY
 - EMGR EMERGENCY REMOTE

- FINISH**
- FCU CUSTOM (ANY FINISH AVAILABLE)

- COMPLIANCE**
- ES ENERGY STAR (WHEN SPECIFIED)

- ACCESSORIES**
- EPC EXTERNAL PHOTOCELL
 - FUS FUSE
 - IB INDIVIDUAL BOX
 - IPC INTERNAL PHOTOCELL
 - OC OCCUPANCY SENSOR
 - SP SURGE PROTECTOR
 - TTP TAMPER SCREWS

For Additional Accessories and Options Visit www.aslighting.com

ASL
 25 Twelfth Street
 Brooklyn, NY 11215-3820

Toll Free
 Phone: 800-369-1101
 Fax: 800-552-3465



Local
 Phone: 718-369-1100
 Fax: 718-369-1105

Online
 email: info@aslighting.com
 visit: www.aslighting.com

INSE