



Fixture specification

MODEL # : **PLB**


STYLE / WATTAGE / KELVIN / FINISH / LENS / ACCESSORIES / SIZE / COMPLIANCE

PROJECT : _____ TYPE : _____ NOTE : _____



SIZE

- D14-3/8" H5-3/4"
- D17-3/4" H5-3/4"

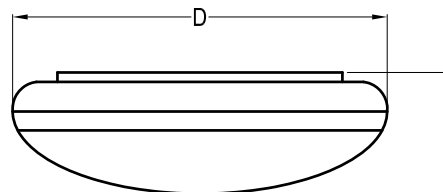

FIXTURE FEATURES

- EACH FIXTURE THERMALLY TESTED TO INSURE LONGEVITY
- MAXIMUM LIGHT DISTRIBUTION THROUGHOUT LENS
- OVER CURRENT, OVER VOLTAGE, SHORT CIRCUIT PROTECTION

HOUSING: INJECTION MOLDED POLYCARBONATE

MOUNTS OVER ELECTRICAL BOX

FINISH: WHITE
LENS: OPAL WHITE POLYCARBONATE
UV STABILIZED
NON-YELLOWING

POWER FACTOR: HIGH
INPUT VOLTAGE: 120-277V/50/60Hz
COMPLIANCE: UL AND/OR CSA LISTED
KELVIN: 3000
CRI: 80
MADE IN AMERICA
WET LOCATION

LED LIGHT SOURCE

- LG / NICHIA BRAND LED CHIPS
- CONSTANT CURRENT DESIGNN AVERAGE 100 - 120LPM (LUMEN PER WATT) AT MODULE EFFICACY
- TRIAC OR ELECTRONIC LOW VOLTAGE DIMMING DOWN TO 5% WITH WALL BOX DIMMERS
- DRIVER: UL LISTED
- MODULE: CSA LISTED
- LM80 & LM82 TESTED
- ROHS COMPLIANT
- LIFE HOURS: 50,000
- WARRAANTY: LIMITED 5 YEARS

SYSTEM WATTAGE	LED ENGINE LUMENS					LEGACY 30K SUBSTITUTE
	2700K	3000K	3500K	4000K	5000K	
23		1620		1620	1620	CFL 2 x 18
34		2380		2380	2380	CFL 2 x 26

SPECIAL OPTIONS

DRIVER

- EMG EMERGENCY
- EMGR EMERGENCY REMOTE

KELVIN

- 2700K
- 3500K
- 4000K
- 5000K

COMPLIANCE

- ES ENERGY STAR (WHEN SPECIFIED)

ACCESSORIES

- FUS FUSE
- IB INDIVIDUAL BOX
- IPC INTERNAL PHOTOCCELL
- OC OCCUPANCY SENSOR
- SP SURGE PROTECTOR

For Additional Accessories and Options Visit www.aslighting.com

ASL
25 Twelfth Street
Brooklyn, NY 11215-3820

Toll Free
Phone: 800-369-1101
Fax: 800-552-3465



Local
Phone: 718-369-1100
Fax: 718-369-1105

Online
email: info@aslighting.com
visit: www.aslighting.com

© copyright 2008 by American Scientific Lighting Corp. All rights reserved.

PLB