




Fixture Specification

MODEL # VTN LED
 STYLE / LIGHT / WATTAGE / KELVIN / DRIVER / FINISH / LENS / ACCESSORIES / SIZE / COMPLIANCE
 SOURCE / DETAIL

PROJECT : _____ **TYPE :** _____ **NOTE :** _____

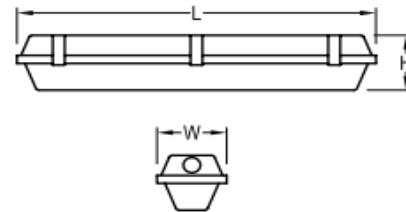

Clear
UV S
Non

FIXTURE FEATURES

- EACH FIXTURE THERMALLY TESTED TO INSURE LONGEVITY
- MAXIMUM LIGHT DISTRIBUTION THROUGHOUT LENS
- OVER CURRENT, OVER VOLTAGE, SHORT CIRCUIT PROTECTION

BASE: INJECTION MOLDED POLYCARBONATE MOUNTS OVER ELECTRICAL BOX WITH CENTER NIPPLE AND / OR SCREWS

FINISH: WHITE

LENS: CLEAR RIBBED POLYCARBONATE UV STABILIZED NON-FLUORESCENT

SIZE(S) SEE BELOW

KELVIN: 4000K **CRI:** 90

POWER FACTOR: HIGH

VOLTAGE: 90V / 305VAC

COMPLIANCE: UL LISTED WET LOCATION

MIA: MADE IN AMERICA

LED LIGHT SYSTEM

- LG / NICHIA BRAND LED CHIPS
- CONSTANT CURRENT DESIGN
- AVERAGE 85 (LPW) LUMENS PER WATT
- DIMMING DOWN TO 10 % WITH MOST STANDARD 0 - 10 VOLT WALL BOX DIMMERS
- DRIVER : UL LISTED
- MODULE : CSA LISTED
- LM80 TESTED
- ROHS COMPLIANT
- LIFE HOURS : 50,000
- WARRANTY : LIMITED 5 YEARS

SYSTEM WATTAGE ESTIMATE	LED ENGINE LUMENS				LED'S PER MODULE	LEGACY 40K SUBSTITUTE
	2700K	3000K	3500K	4000K		
13	1014	1083	1130	1165	60	T8 17 / T5 14
19	1351	1444	1506	1553	90	T8 25 / T5 21
21	1622	1508	1808	1864	120	T8 32 / T5 28
24	1824	1696	2033	2096	120	(2) T8 17 / T5 14
39	2782	2587	3120	3198	180	(2) T8 25 / T5 21
44	3300	3069	3679	3793	240	(2) T8 32 / T5 28

SPECIAL OPTIONS

KELVIN

- 2700K
- 3000K
- 3500K

FINISH

- FB - BLACK
- FBZ - BRONZETONE
- FCU - CUSTOM
- FSN - SATIN NICKEL
- FW - WHITE

LENS

- CPA - CLEAR PRISMATIC
- FA - FAUX ALABASTER
- WA - WHITE ACRYLIC
-

ACCESSORIES

- EBA - EXTENDED BASE
- FUS - FUSE
- IB - INDIVIDUAL BOX
- IPC- PHOTO CONTROL
- PCH - PULL CHAIN
- TP - TAMPER SCREWS

SIZE LENGTH WIDTH HEIGHT

- 24" 4-5/8" 4-1/8"
- 48" 4-5/8" 4-1/8"
-
-

TECHNOLOGY

- EMG - EMERGENCY
- EMGR - REMOTE
- OC - OCCUPANCY SENSOR

CUSTOM

-
-
-
-

1
2
3
4

For Additional Accessories and Options Visit www.aslighting.com