




Fixture specification

MODEL #: **VTW**

STYLE / LAMP / LAMP / WATTAGE / KELVIN / BALLAST / FINISH / LENS / ACCESSORIES / SIZE / COMPLIANCE
QTY TYPE DETAIL

PROJECT : _____ TYPE : _____ NOTE : _____

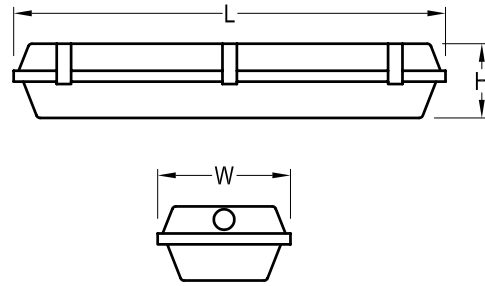

Light Source

Type	Linear						Length	Width	Height
	T8			T5 HO					
Wattage	17	25	32	24	39	54	24"	7-3/8"	4-1/8"
Quantity	2	-	-	2	-	-	48"	7-3/8"	4-1/8"
	-	-	2	-	-	2			

Standard Features

BASE	Injection Molded Polycarbonate Mounts to Structure with Pre-Punched Holes for Secure Anchoring	FINISH	White	LENS	Clear Ribbed Polycarbonate UV Stabilized Non Yellowing
LAMP	Linear - 4100K	TECHNOLOGY	Electronic Ballast Normal Power Factor 120V-60Hz AC UL Listed Wet Location		

Special options

Please Note: Standard Features May Change if Fixtures are Ordered with Special Option(s).

BALLAST	<input type="checkbox"/> DV 120/277 <input type="checkbox"/> EBD Dimmable <input type="checkbox"/> EMG Emergency <input type="checkbox"/> HPF High Power Factor <input type="checkbox"/> V 277 Volt	TECHNOLOGY	<input type="checkbox"/> LED <input type="checkbox"/> Occupancy Sensor
----------------	---	-------------------	---

KELVIN 3500K 4100K MIA Made In America **COMPLIANCE** ES Energy Star

For Additional Accessories and Options Visit www.aslighting.com

ASL
25 Twelfth Street
Brooklyn, NY 11215-3820

Toll Free
Phone: 800-369-1101
Fax: 800-552-3465

Local
Phone: 718-369-1100
Fax: 718-369-1105

Online
email: info@aslighting.com
visit: www.aslighting.com



© copyright 2008 by American Scientific Lighting Corp. All rights reserved.

VTW