





# Fixture Specification

MODEL NUMBER: WPN

JOB: \_\_\_\_\_ TYPE: \_\_\_\_\_

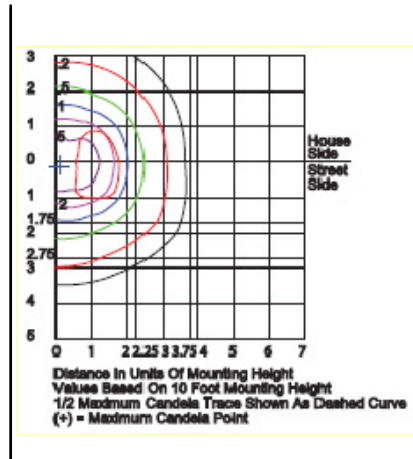

WPN/MH100

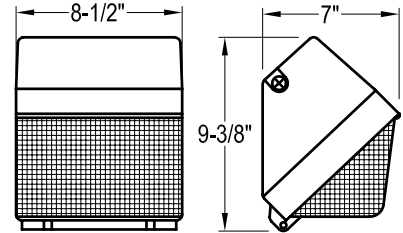

MP

## Light Source

Type	Quad, Spiral or Triple	Triple	High Pressure Sodium				Metal Halide		
Wattage	26	32 42	35	50	70	100	50	70	100
Quantity	1	1 1	1	1	1	1	1	1	1

## Standard Features

<b>BASE</b>	Die Cast Aluminum Three 1/2" Threaded Apertures Weather Seal Silicone Gasket Mounts over Electrical Box or to Structure for Surface Conduit	<b>FINISH</b>	Bronzitone	<b>LENS</b>	Clear Prismatic Polycarbonate UV Stabilized Non Yellowing Hinged Lens Secured to Housing with Four Stainless Screws for a Weather Tight Seal and Easy Relamping
<b>LAMP</b>	Quad, Triple, and Spiral - 2700K	<b>ELECTRICAL/HID</b>	Magnetic Ballast HPS/NPF/120V MH50/NPF/120-277V All Other Wattages: HPF/120-208-240-277V UL Listed Wet Location	<b>REFLECTOR</b>	Semi Specular Asymmetric Anodized Aluminum
<b>ELECTRICAL/FLUORESCENT</b>	Electronic Ballast Normal Power Factor 120V-60Hz AC UL Listed Wet Location				

## Special options

Please Note: Standard Features May Change if Fixtures are Ordered with Special Option(s).

- BALLAST**
- DV 120/277 Volt
  - HPF High Power Factor
  - QV 120/208/240/277 Volt
  - V 277 Volt

- FINISH**
- FW White

- ACCESSORIES**
- EPC External Photocell
  - IPC Internal Photocell
  - MP Mounting Plate
  - QR Quartz Restrike

- KELVIN**
- 3500K
  - 4100K

ASL  
25 Twelfth Street  
Brooklyn, NY 11215-3820

Toll Free  
Phone: 800-369-1101  
Fax: 800-552-3465

Local  
Phone: 718-369-1100  
Fax: 718-369-1105

Online  
email: info@aslighting.com  
visit: www.aslighting.com

**WALL  
PACK**



© copyright 2010 by American Scientific Lighting Corp. All rights reserved.

**WPN**